


GGC

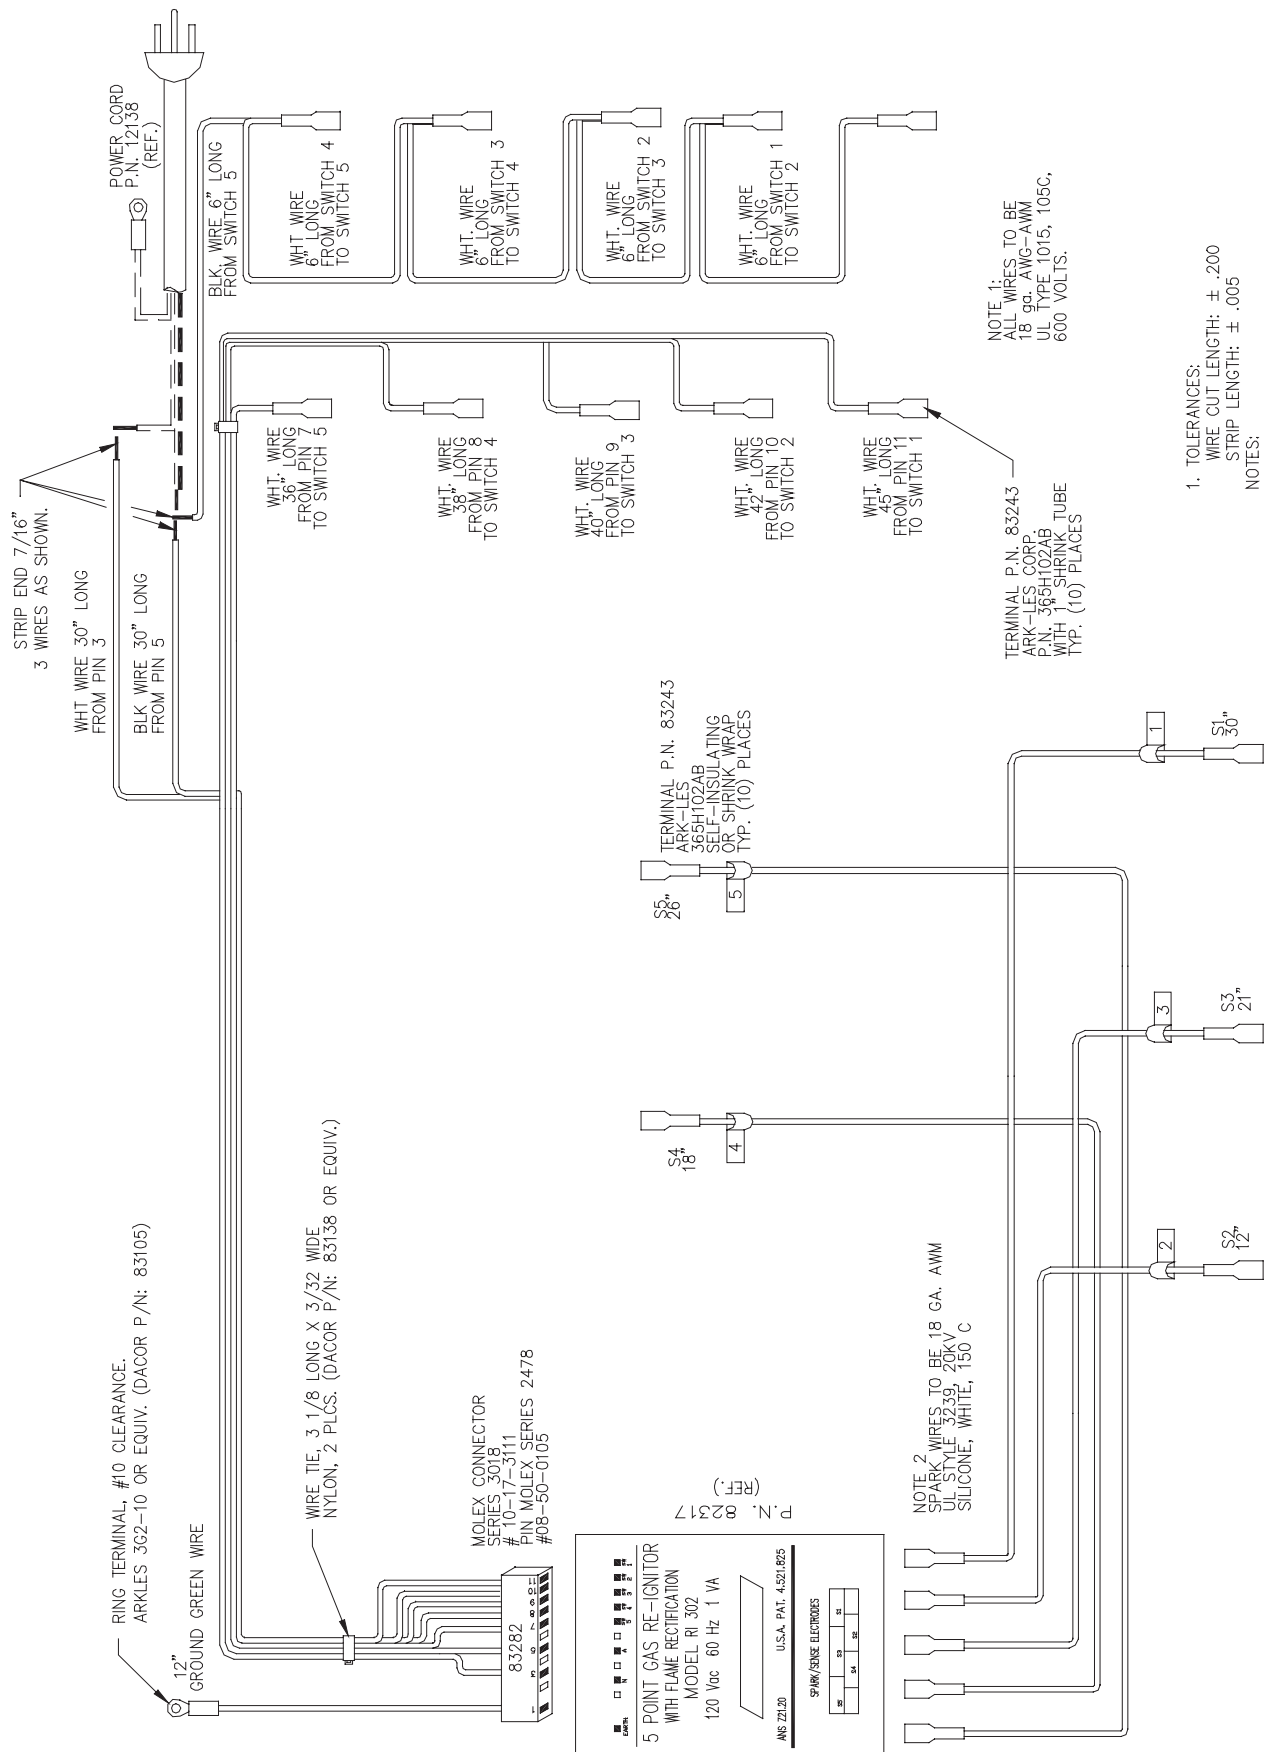

NOTE 1:
ALL WIRES TO BE
18 GA. AWG-AWM
UL TYPE 1015, 105C,
600 VOLTS.

TERMINAL P.N. 83243
ARK-LES CORP.
P.N. 365H102AB
WITH 1 SHRINK TUBE
TYP. (10) PLACES

NOTE 2:
SPARK WIRES TO BE 18 GA. AWM
UL STYLE 3239, 20KV
SILICONE, WHITE, 150 C

1. TOLERANCES:
WIRE CUT LENGTH: ± .200
STRIP LENGTH: ± .005
- NOTES:

5 POINT GAS RE-IGNITOR
WITH FLAME RECTIFICATION
MODEL RI 302
120 Vac 60 Hz 1 VA

ANG 72120 U.S.A. PAT. 4,521,825

SPARK/SENSE ELECTRODES

S1	S2	S3	S4	S5
----	----	----	----	----

P. N. 822317 (REF.)